


- Max. resolution: 2560 x 1440
- 8 internal SATA HDD
- DVI/VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phone

## sureREC-HDR-16R/32R/64R

### sureREC HD Video Recorder



Unit: mm

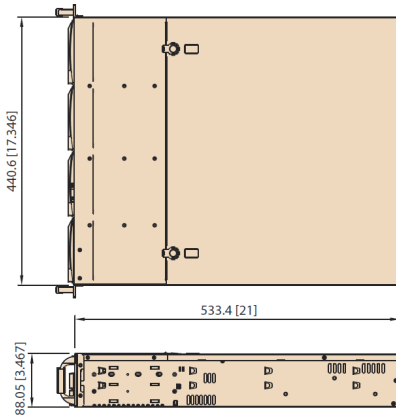

Terms & Conditions 使用細則  
Design and specifications are subject to change without prior notice. Copyright © 2019 Signal Communications Limited.  
TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

		sureREC-HDR-16R	sureREC-HDR-32R	sureREC-HDR-64R
CAMERA INTERFACE	MAX. CHANNELS	16	32	64
	COMPATIBLE MODELS	TeleEye MX, MP400, MP200, MQ & ONVIF* (Profile S) *License is required		
VIDEO	OUTPUTS	1 x DVI, 1 x VGA (max. resolution 1080p)		
CODING	VIDEO & AUDIO	SMAC-M, H.264		
RECORDING	MODES	Manual, Scheduled, Event-driven		
	STORAGE	SATA, internal x 8		
	MAX. RECORDING PERFORMANCE	25 fps per channel @ WQHD		
	RAID	RAID 5		
EVENT	TYPES	IPC alarm, IPC motion dection, Video loss, Recording failure		
	ACTIONS	Alert sound, Email notification, Event recording		
AUDIO	INPUTS	Mic in x 1		
	OUTPUTS	line out x 1		
COMMUNICATION	NETWORK	Gigabit port x 1		
	SURELINK	YES		
	USB	USB2.0 x 6		
	DVD WRITER	YES		
CPU		Intel® Core™ i5		
MEMORY		4 GB DDR3 Ram		
OPERATING SYSTEM		MS® Windows 7 Professional Edition (64-bit)		
POWER	VOLTAGE	110-240V AC		
	MAX. RATING	500W		
OPERATING	AMBIENT TEMPERATURE	0°C - 40°C		
ENVIRONMENT	RELATIVE HUMIDITY	10% - 85%		
MECHANICAL DESIGN	DIMENSION	437mm (W) x 534mm (D) x 89mm (H)		
	WEIGHT	10KG		